

USER MANUAL

MODEL:

KWC-1

Wireless Charging Spot



Contents

Introduction	1
Getting Started	1
Overview	2
Defining KWC-1	3
Power Cord Options	4
Installing KWC-1	5
Drilling a Hole in the Table	5
Mounting KWC-1 in the Table	5
Connecting Cables	6
Using KWC-1	7
Using Wireless Charger Directly	7
Using Wireless Charger with Receiver	8
Technical Specifications	9

Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront video, audio, presentation, and broadcasting professionals on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment.
- Review the contents of this user manual.



Go to www.kramerav.com/downloads/KWC-1 to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).

Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables (we recommend Kramer high-performance, high-resolution cables) to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables).
- Do not secure the cables in tight bundles or roll the slack into tight coils.
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality.
- Position your Kramer **KWC-1** away from moisture, excessive sunlight and dust.

Safety Instructions



Caution:

- This equipment is to be used only inside a building. It may only be connected to other equipment that is installed inside a building.
- For products with relay terminals and GPIO ports, please refer to the permitted rating for an external connection, located next to the terminal or in the User Manual.
- There are no operator serviceable parts inside the unit.

Recycling Kramer Products

The Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC aims to reduce the amount of WEEE sent for disposal to landfill or incineration by requiring it to be collected and recycled. To comply with the WEEE Directive, Kramer Electronics has made arrangements with the European Advanced Recycling Network (EARN) and will cover any

costs of treatment, recycling and recovery of waste Kramer Electronics branded equipment on arrival at the EARN facility. For details of Kramer's recycling arrangements in your particular country go to our recycling pages at www.kramerav.com/support/recycling/.

Overview

Thank you for purchasing the Kramer **KWC-1 Wireless Charging Spot**, which is ideal for boardrooms, conference and training rooms or any place where wireless charging is required!

KWC-1 (Kramer Wireless Charging) is a built-in table mounted Qi standard compliant charging spot that enables you to charge your mobile device by simply placing it on the charging spot.



If your mobile device does not support wireless charging, you can connect it to a Kramer wireless charging receiver (sold separately) and then place it on the charging spot.

KWC-1 features a black or clear anodized sandblast finish.

Defining KWC-1

This section defines **KWC-1**.

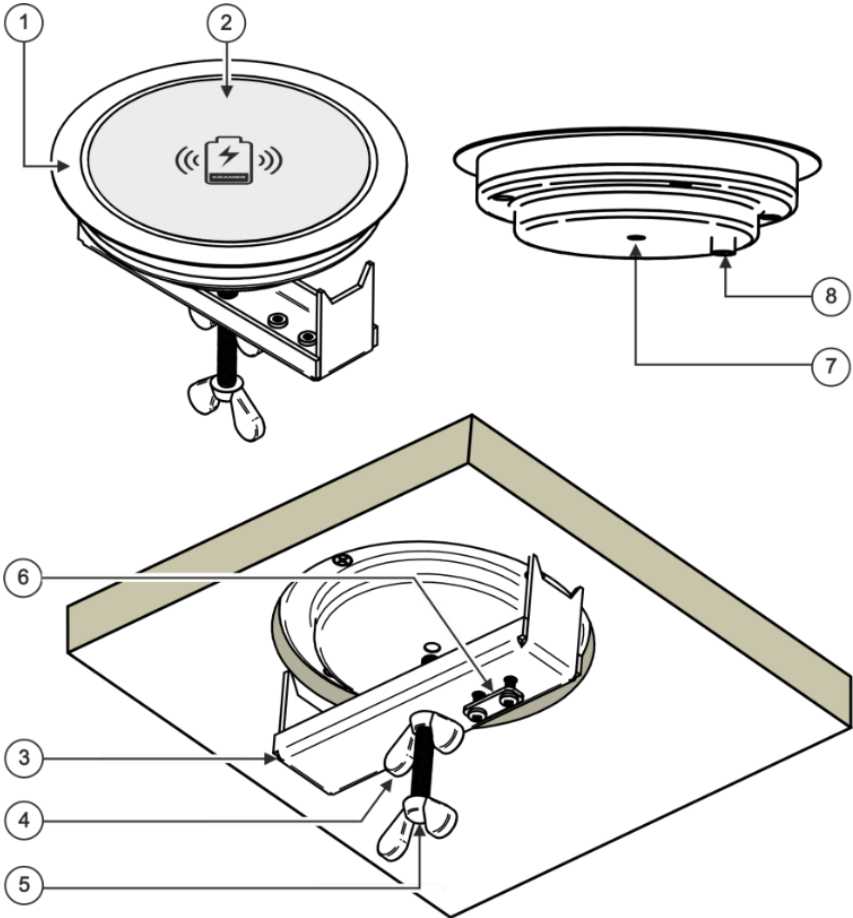


Figure 1: KWC-1 Wireless Charging Spot

#	Feature	Function
1	Outer Rim	Fits over the table surface inserted into the table cutout.
2	Charging Spot	For mobile device wireless charging.
3	Mounting Bracket	For securing the unit to the table surface.
4	Locking Butterfly Screw	Tighten to lock the mounting butterfly screw (one for each clamp).
5	Mounting Butterfly Screw	Tighten to secure the unit to the table surface.
6	Cable Bracket	To fix the power cable to the unit.
7	Bracket Mounting Screw Hole	For inserting the mounting screw.
8	5V DC Power Connector	Connects to the power adapter.

Power Cord Options

You can order any of the following power cords to use with a modular **KWC-1**:

Power Cord Type	Description	P/N
6ft/110V (North America)	C-AC/US (110V)	91-000099
6ft/125V (Japan)	C-AC/JP (125V)	91-000699
6ft/220V (Europe)	C-AC/EU (220V)	91-000199
6ft/220V (Israel)	C-AC/IL (220V)	91-000999
6ft/250V (UK)	C-AC/UK (250V)	91-000299
6ft/250V (India)	C-AC/IN (250V)	91-001099
6ft/250V/10A (China)	C-AC/CN (250V)	91-001199
6ft/250V/10A (South Africa)	C-AC/ZA (250V)	91-001299
240V Y-version (6ft), UK	C-ACY/UK	91-000599

Installing KWC-1

To install KWC-1:

1. Cut an opening in the table (see [Drilling a Hole in the Table](#) on page 5).
2. Insert the unit through the opening and secure it to the table (see [Mounting KWC-1 in the Table](#) on page 5).
3. Connect the cable (see [Connecting Cables](#) on page 6).

Drilling a Hole in the Table

To drill an opening in the table:

1. Using any standard hole saw drill bit with a diameter ranging from 106mm to 108mm (4.17in to 4.25in), drill a hole in the table in the desired location.



The thickness of the table should be 3in (76mm) or less.

2. Clean the table surface.




Take care not to damage the table. Kramer Electronics is not responsible for any damage caused to the table.


Mounting KWC-1 in the Table

To mount the unit:

1. Insert **KWC-1** into the hole cut in the table making sure that the outer rim sits firmly against the surface of the table.
2. Fit the screw into the mounting bracket (a).
3. From underneath the table, insert/slide the screw into the appropriate hole in **KWC-1**. Tighten the mounting screw butterfly (b) upward against the table.
4. Lock the mounting screw into position with the locking butterfly screw (c).

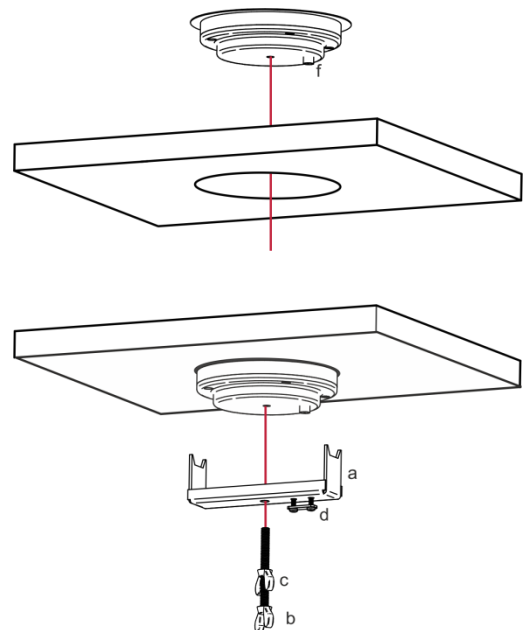

5. Mount the power adapter to the underside of the table using the power adapter bracket and screws (e).
6. Pass the power cord through the cable bracket (d) and connect to the power connector on the underside of **KWC-1** (f).

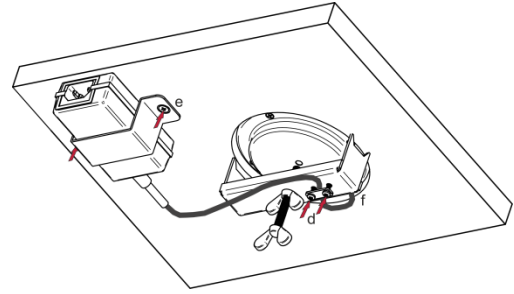

Connecting Cables

Connect **KWC-1** to the power adapter and the power adapter to the mains electricity (the power cord is purchased separately, see [Power Cord Options](#) on page [4](#)).

Using KWC-1

KWC-1 wireless charging spot can be used in one of the following ways:

- [Using Wireless Charger Directly](#) – page [7](#)
- [Using Wireless Charger with Receiver](#) – page [8](#)

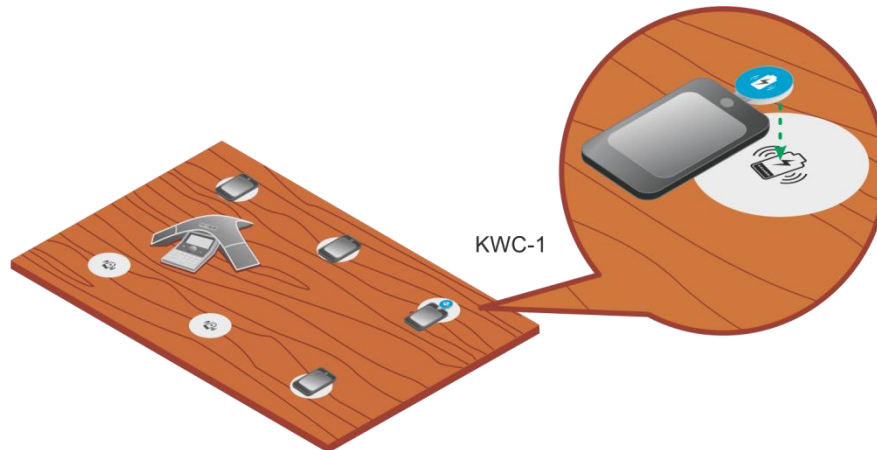


Figure 2: KWC-1 Boardroom Installation

Using Wireless Charger Directly

If your mobile device supports wireless charging, you can charge it directly on top of the charging spot.



You can charge only one mobile device at a time.

To use the wireless charger directly:

1. Make sure that the charging spot power cable is connected.
2. Place it on the charging spot until it is fully charged.

Using Wireless Charger with Receiver



You can charge only one mobile device at a time.



When charging a mobile device, do not place any metal or magnetic objects over the receiver.

Charging a mobile device using the receiver in the vicinity of pacemakers, hearing aids, or similar medical electronic devices may interfere with the function of these devices.

Make sure the receivers are used in a cool and well-ventilated environment and away from flammable and explosive objects.

Avoid using the receivers in extreme temperatures or high humidity.

Kramer **KWC-MUSB** and **KWC-LTN** wireless charging receivers (sold separately) can be used with Kramer Wireless Charging (KWC) products for mobile devices that **DO NOT** have a built-in wireless charging receiver.

KWC-MUSB Micro USB receiver ([Figure 3](#)) and **KWC-LTN** lightning receiver ([Figure 4](#)) are wireless power receivers that utilize electromagnetic induction to charge mobile devices wirelessly and are compatible with the Qi standard for wireless chargers (with security eyeholes).



Figure 3: KWC-MUSB Micro USB Receiver



Figure 4: KWC-LTN Lightning Receiver



Figure 5: Receiver Underside

To use the wireless charger with a receiver:

1. Connect your mobile device to either a **KWC-MUSB** Micro USB receiver or a **KWC-LTN** lightning receiver, as required.
2. Place the mobile device with the attached receiver centered on the charging spot (correct side facing the charging spot, see [Figure 5](#)) until it's fully charged.

Technical Specifications

FUSE RATING:	T 6.3A 250V
POWER CONSUMPTION:	Charging spot: 12V DC, 1.25A
CHARGING EFFICIENCY:	73%
CHARGING POWER OUTPUT:	900 mA Max
SAFETY REGULATORY COMPLIANCE:	CE compliant
STANDARD:	Qi
OPERATING TEMPERATURE RANGE:	+5 to +45 Deg. Centigrade
OPERATING HUMIDITY RANGE:	10 to 90% RHL, non-condensing
STORAGE TEMPERATURE RANGE:	-20 to +70 Deg. Centigrade
STORAGE HUMIDITY RANGE:	5 to 95% RHL, non-condensing
DIMENSIONS:	Bezel diameter: 12cm (4.7") Shipping dimensions: 23.0cm x 13.5cm x 9.8cm (9.05" x 5.3" x 3.86") W, D, H
WEIGHT:	Gross weight: 0.75kg (1.65lbs) approx.
ACCESSORIES:	Mounting bracket, power adapter, power adapter bracket
OPTIONS:	Wireless charging receivers, power cords (see Power Cord Options on page 4)
Specifications are subject to change without notice at www.kramerav.com	

The warranty obligations of Kramer Electronics Inc. ("Kramer Electronics") for this product are limited to the terms set forth below:

What is Covered

This limited warranty covers defects in materials and workmanship in this product.

What is Not Covered

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Kramer Electronics to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover cartons, equipment enclosures, cables or accessories used in conjunction with this product.

Without limiting any other exclusion herein, Kramer Electronics does not warrant that the product covered hereby, including, without limitation, the technology and/or integrated circuit(s) included in the product, will not become obsolete or that such items are or will remain compatible with any other product or technology with which the product may be used.

How Long this Coverage Lasts

The standard limited warranty for Kramer products is seven (7) years from the date of original purchase, with the following exceptions:

1. All Kramer VIA hardware products are covered by a standard three (3) year warranty for the VIA hardware and a standard three (3) year warranty for firmware and software updates; all Kramer VIA accessories, adapters, tags, and dongles are covered by a standard one (1) year warranty.
2. All Kramer fiber optic cables, adapter-size fiber optic extenders, pluggable optical modules, active cables, cable retractors, all ring mounted adapters, all Kramer speakers and Kramer touch panels are covered by a standard one (1) year warranty.
3. All Kramer Cobra products, all Kramer Calibre products, all Kramer Minicom digital signage products, all HighSecLabs products, all streaming, and all wireless products are covered by a standard three (3) year warranty.
4. All Sierra Video MultiViewers are covered by a standard five (5) year warranty.
5. Sierra switchers & control panels are covered by a standard seven (7) year warranty (excluding power supplies and fans that are covered for three (3) years).
6. K-Touch software is covered by a standard one (1) year warranty for software updates.
7. All Kramer passive cables are covered by a ten (10) year warranty.

Who is Covered

Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.

What Kramer Electronics Will Do

Kramer Electronics will, at its sole option, provide one of the following three remedies to whatever extent it shall deem necessary to satisfy a proper claim under this limited warranty:

1. Elect to repair or facilitate the repair of any defective parts within a reasonable period of time, free of any charge for the necessary parts and labor to complete the repair and restore this product to its proper operating condition. Kramer Electronics will also pay the shipping costs necessary to return this product once the repair is complete.
2. Replace this product with a direct replacement or with a similar product deemed by Kramer Electronics to perform substantially the same function as the original product.
3. Issue a refund of the original purchase price less depreciation to be determined based on the age of the product at the time remedy is sought under this limited warranty.

What Kramer Electronics Will Not Do Under This Limited Warranty

If this product is returned to Kramer Electronics or the authorized dealer from which it was purchased or any other party authorized to repair Kramer Electronics products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. Kramer Electronics will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. Kramer Electronics will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programming required for a specific installation of this product.

How to Obtain a Remedy Under This Limited Warranty

To obtain a remedy under this limited warranty, you must contact either the authorized Kramer Electronics reseller from whom you purchased this product or the Kramer Electronics office nearest you. For a list of authorized Kramer Electronics resellers and/or Kramer Electronics authorized service providers, visit our web site at www.kramerav.com or contact the Kramer Electronics office nearest you.

In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized Kramer Electronics reseller. If this product is returned under this limited warranty, a return authorization number, obtained from Kramer Electronics, will be required (RMA number). You may also be directed to an authorized reseller or a person authorized by Kramer Electronics to repair the product.

If it is decided that this product should be returned directly to Kramer Electronics, this product should be properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization number will be refused.

Limitation of Liability

THE MAXIMUM LIABILITY OF KRAMER ELECTRONICS UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

Exclusive Remedy

TO THE MAXIMUM EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF KRAMER ELECTRONICS CANNOT LAWFULLY DISCLAIM OR EXCLUDE IMPLIED WARRANTIES UNDER APPLICABLE LAW, THEN ALL IMPLIED WARRANTIES COVERING THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THIS PRODUCT AS PROVIDED UNDER APPLICABLE LAW.

IF ANY PRODUCT TO WHICH THIS LIMITED WARRANTY APPLIES IS A "CONSUMER PRODUCT" UNDER THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C.A. §2301, ET SEQ.) OR OTHER APPLICABLE LAW, THE FOREGOING DISCLAIMER OF IMPLIED WARRANTIES SHALL NOT APPLY TO YOU, AND ALL IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR THE PARTICULAR PURPOSE, SHALL APPLY AS PROVIDED UNDER APPLICABLE LAW.

Other Conditions

This limited warranty gives you specific legal rights, and you may have other rights which vary from country to country or state to state.

This limited warranty is void if (i) the label bearing the serial number of this product has been removed or defaced, (ii) the product is not distributed by Kramer Electronics or (iii) this product is not purchased from an authorized Kramer Electronics reseller. If you are unsure whether a reseller is an authorized Kramer Electronics reseller, visit our web site at www.kramerav.com or contact a Kramer Electronics office from the list at the end of this document.

Your rights under this limited warranty are not diminished if you do not complete and return the product registration form or complete and submit the online product registration form. Kramer Electronics thanks you for purchasing a Kramer Electronics product. We hope it will give you years of satisfaction.



P/N:



2900-300504

Rev:



9



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing

For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.