

DUKANE

Professional Installation Projectors ideal for corporate,
higher education and museum applications

6700 Series



Powerful installation projectors equipped to take on the most demanding integration projects

Powerful Tools

- Multi-display support with Picture by Picture/Picture Out Picture
- TileMatrix (internal multi-screen splitter) enables 4Kx2K resolution utilizing 4 projectors without the need for external hardware
- Built-in daisy chain capabilities support multi-display applications
- Seamlessly blend multiple images with integrated edge blending capabilities

Integrated

- 4K Ready - HDR10, BT.2020 signal format applicable for use with the "Ultra HD Blu-ray" and "4K TV broadcasting" Project uncompressed FHD video with integrated HDBase™
- High performance video processing/scaling creates life-like images
- Integrated software applications such as AMX Beacon, Crestron Roomview, Extron XTP and PJ Link allow for complete interactivity and control
- Basic control of competitors product reducing the need for reprogramming of a control system.


Flexible

- Enjoy greater installation flexibility with a complete line of optional bayonet style lenses 8) for quick and easy exchange. Lens throw distances range from 2.5 to 68.5 ft
- Tilt-free installation capabilities make these projector ideal for almost any install environment, including portrait orientation
- Up to 60% vertical lens shift and +/- 30% horizontal lens shift capabilities make alignment easy

Screen Splitter


Dukane is committed to bringing the latest and greatest innovation to projectors. Multi-display capabilities and TileMatrix technologies are integrated into the new 6700 series projectors. This processing is all done internally and therefore eliminates the additional hardware typically required to produce a beautiful 4K resolution image.

Screen Splitter (Multi Display) by Daisy Chain

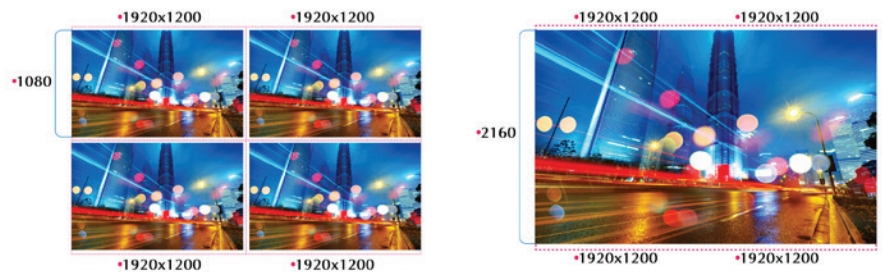

Stacking correction

The industry's first built-in stacking correction capabilities (up to four projectors) allows the projectors to boost an image's brightness up to 36,000 lumens, which is ideal for larger-sized screens and environments with heavy ambient light. This feature also prevents the complete loss of an image, which can happen when using only one projector.



Edge blending

This function seamlessly blends multiple projected images to display a single high-resolution image.



MultiPresenter

Utilization of the optional MultiPresenter Stick provides those looking for a network connection easy connection with up to 12 devices at once. (Win, MAC, Android, iOS) Screen mirroring for Android and Win. Simple annotation software.



Built-In HDBaseT Support

Simplify your installations with HDBaseT. Optimized for video applications and supporting uncompressed full HD digital video, audio, ethernet, power and various control signals. With only a single cable (up to 100m) to run, infrastructure and labor costs are reduced, installations are significantly easier, and there is no cable clutter to manage. With uncompressed HD video support, images have never been more stunning. What's more, control signals are contained in the same cable.



GET CONNECTED WITH A WIDE SELECTION OF INPUTS

- **Multiple Digital computer inputs** ensure quick switching between presentations
- **Five audio inputs (one mini stereo [HDMI1™ & HDMI2™, DisplayPort and HDBaseT])** make it easy to add sound to enhance your presentations


Remote control

Wired and wireless backlit remote allows you to adjust for complete control of the projector's menu structure in a well lit or dark environment. Direct controls such as lamp mode, aspect ratio, volume and input selection eliminates multiple button pushes.



Digital Inputs

Among the 6700 Series' wide selection of inputs are dual HDMI w/ HDCP and DisplayPort w/HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.

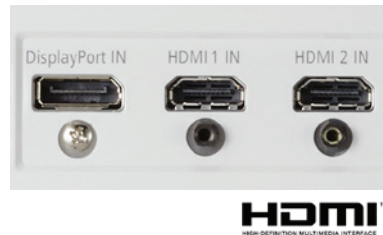

Input panel cover

This optional accessory creates a clean look for your installation, while hiding signal cables and the power cord.



ADVANCED SOFTWARE FEATURES

Cornerstone

Enhanced keystone correction allows for horizontal, vertical and diagonal image correction for aligned images even when the projector is set up at an angle to the screen.




3D

When combined with active shutter glasses and 3D emitter, the 6700 Series Projectors create 3D images from a computer or Blu-ray player. The 6700 Series utilize the 3D sync line output from the projector to connect to the 3D emitter. Optional 3D glasses and emitters from XPAND are available from Dukane.



Geometric Correction

Projecting an image isn't confined to a standard flat screen or wall with the 6700 Series. Geometric correction allows these models to project an image on spheres, cylinders, corner angles and many more non-standard surfaces.

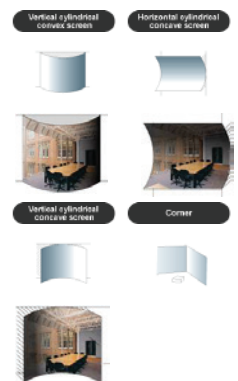

10,000-hour filter life

Dukane is committed to designing its products to provide long lifecycles. This virtually maintenance-free filter reduces the frequency at which cleaning is required, thereby decreasing total cost of ownership.




Tilt-free

The projector can be rotated freely (360°) to orient the image depending on the installation requirements.



Portrait mode

Allows the projector to be rotated (and screen if necessary) to a vertical alignment so that portrait content can be viewed without black bars on the side when landscape mode is used.



UNIQUE FEATURES

Variable audio-out enables the remote control to be used to adjust volume of self-powered external speakers that are connected to the projector. In stand-by mode, the audio-out stays active, allowing the last input used to pass to the self-powered external speakers.

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

64-step image magnification with location control

Built-in HTTP page for control and monitoring over a LAN network. Email notification of error messages or lamp end-of-life can be sent to remote locations.

WARRANTY

Five (5) year limited warranty plus Dukane's 1 year Peace of Mind Loaner Program

IN THE BOX


Remote control, batteries, power cord.

ACCESSORIES

456-6765WU	Replacement Lamp
RMT-PJ37	Replacement Remote Control
Optional Lenses	NP11FL, NP12ZL, NP13ZL, NP14ZL, NP30ZL, NP40ZL, NP41ZL, NP42ZL
DS1-MP10RX1	MultiPresenter Stick
NP10CV	Terminal Cover
NP04FT	Replacement Filter
XPAND X105-RF-1	3D Glasses
XPAND ADO25-RF-X1	RF Emitter
PRG-UNV	Ceiling mount
AEC006009	Adjustable Extension Column, 6" - 9"
AEC012018	Adjustable Extension Column, 12" - 18"
AEC0203	Adjustable Extension Column, 2' - 3'
AEC0305	Adjustable Extension Column, 3' - 5'
6POW	Power Cord
6VGA	RGB Signal Cable

ORDERING MODEL NUMBERS

6765WU / 6765WU-L
6780WU / 6780WU-L
6785W / 6785W-L
6790 / 6790-L

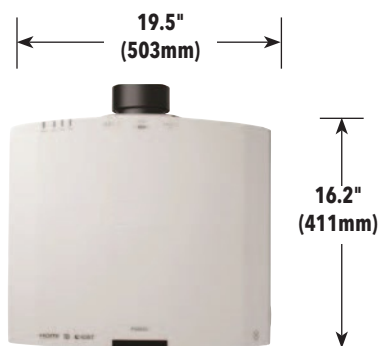

		6765WU	6780WU	6785W	6790
Display Technology		0.76" LCD w MLA			
Light Output (lumens)		6500 normal	8000 normal	8500 normal	9000 normal
Resolution	Native	WUXGA 1920 x 1200		WXGA 1280 x 800	XGA 1024 x 768
	Maximum	4K 4096 x 2160			
Contrast Ratio (up to)		8,000:1 with auto iris	10,000:1 with auto iris		
Lamp Life (up to)		3000 hours normal / 5000 hours eco			
Screen Size (diagonal)		40 to 500 in. / 1.02 to 12.7m, NP40ZL, NP41ZL, NP42ZL (50 to 500 in. / 1.27 to 12.7m)			
Throw Ratio	NP11FL	0.81:1			
	NP30ZL	0.79 - 1.04:1			
	NP12ZL	1.16 - 1.52:1			
	NP13ZL	1.46 - 2.95:1			
	NP14ZL	2.90 - 4.68:1			
	NP40ZL	0.79 - 1.10			
	NP41ZL	1.30 - 3.02			
	NP42ZL	2.99 - 5.98			
Projection Distance		2.5 to 68.5 ft. / 0.74 to 20.9m			
Projection Angle		10.3 to 10.8° tele / 13.7 to 14.5° wide			
Lens	Zoom	Powered / Manual			
	Zoom Ratio	Variable			
	Focus	Powered / Manual			
	NP11FL	Manual zoom / Manual focus, F= 2.3, f= 13.2mm, 2.6 lbs. / 1.2 kg			
	NP30ZL	Manual zoom / Manual focus, F= 1.9 to 2.1, f= 13.2 to 17.2mm, 2.6 lbs. / 1.2 kg			
	NP12ZL	Manual zoom / Manual focus, F= 2.2 to 2.69, f= 19.4 to 25.3mm, 2.6 lbs. / 1.2 kg			
	NP13ZL	Manual zoom / Manual focus, F= 1.7 to 2.37, f= 24.2 to 48.6mm, 1.9 lbs. / 0.84 kg			
	NP14ZL	Manual zoom / Manual focus, F= 2.2 to 2.64, f= 48.5 to 77.6mm, 2.6 lbs. / 1.2 kg			
	NP40ZL	Power zoom / Power focus, F=2.0 to 2.43, f= TBD, 4.4 lbs. / 2.0 kg			
	NP41ZL	Power zoom / Power focus, F=1.7 to 2.0, f= 21.8 to 49.8mm, 4.1 lbs. / 1.85 kg			
	NP42ZL	Power zoom / Power focus, F=2.2 to 2.3, f= TBD, 4.1 lbs. / 1.85 kg			
	Shift	Powered +0.5/-0.1 vertical, +/-30 horizontal			
Keystone Correction		+/- 40° horizontal, +/- 40° vertical			
Synchronization Range	Horizontal	Analog: 15-100kHz, Digital: 15-153kHz			
	Vertical	Analog: 48-120Hz, Digital: 24-120Hz			
Supported Video Standards		NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM			
SD/HD Video Signal Compatibility		1080p, 1080i, 720p, 576p, 576i, 480p, 480i			
PC Signal Compatibility		VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WUXGA			
Macintosh Compatibility		Yes			
Input Terminals	RGB1 (analog)	VGA 15 pin D-sub, Component video using ADP-CVTE adapter			
	RGB2 (digital)	HDMI (V1.4) w/HDCP (V2.2)			
	RGB3 (digital)	HDMI (V1.4) w/HDCP (V2.2)			
	RGB4 (digital)	DisplayPort w/HDCP (V1.4)			
	RGB5 (digital)	HDBaseT w/HDCP (V2.2)			
	Audio1	Stereo Mini Jack			
Output Terminals	Monitor Out	HDBaseT			
	Audio Out	Stereo Mini Jack			
	3D Sync Line	3Pin D			
Audio		10W mono			
External Control		RS-232, IR, HDBaseT, DDC/CI, RJ-45			
Sync Compatibility		Separate Sync / Composite Sync / Sync on G			
Power Requirements		100 - 240V AC, 50/60Hz			
Input Current		5.6A - 2.7A	6.2A - 3.1A		
Power Consumption					
(ECO off/ECO Mode/Standby/Power Saving)		506W/390W/0.7W/0.3W	566W/390W/0.7W/0.3W		
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear			
Dimensions (WxDxH)		19.8 x 16.2 x 6.6 in. / 503 x 411 x 168mm			
Net Weight		22.5 lbs. / 10.2 kg			
Fan Noise		39 dB normal / 33 dB eco			
Regulations		USA: UL 1950 FCC Class B, Canada: CSA950 (C-UL), NOM			
Operating Temperature		41° - 104°F / 5° - 40°C			
Humidity		20-80% non-condensing			
Storage		-14° - 122°F / -10° - 50°C			

* Lens does not ship with the projector.
Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit www.dukaneav.com for details.

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

