*Sample installation with clock.
Clock is not included.*

MADE IN U.S.A.   CERTIFIED U.S. STEEL

For horizontal or vertical orientation.

The SCB-700 provides a simple solution to mount a paging speaker and 12" analog clock in a single installation, a set-up typically used in classrooms, recreation facilities, and professional buildings. The dual-function approach provides a clean appearance with reduced fixture and labor costs. Order backbox, speaker, and clock separately.

Note: This model is for use with a surface-mount backbox.

INCLUDES:

- **Construction:** One-piece 18-gauge certified U.S. steel panel with white powder epoxy finish, square perforation (8.44" sq.), and a cutout to mount a standard 12" analog clock
- **Dimensions:** 26" x 14.5"
- **Mounting Aids:**
  – Welded studs to mount an 8" EIA speaker
  – Provisions/hardware to install the universal mounting bracket for vertical or horizontal orientation of a standard 12" analog clock
- **Country of Origin:** Made in U.S.A.

A&E SPECIFICATIONS:

The panel with grille for a clock/speaker center shall be Lowell model SCB-700. It shall be 18-gauge steel with white powder epoxy finish, 26" x 14.5". It shall include a solid face plate with square perforated area, welded studs to install an 8" speaker, and a mounting bracket with hardware for horizontal or vertical installation of a 12" analog clock. The grille shall include screws for installation to a compatible surface-mount backbox. Speaker, surface-mount backbox, and clock shall be ordered separately.
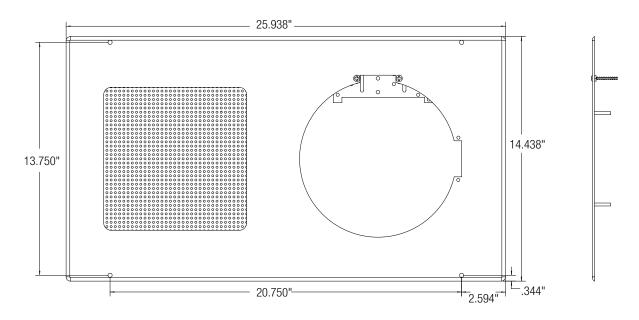
COMPATIBLE COMPONENTS (order separately):

- Speaker: 8" EIA (typically model CT830A-T72 which includes 25/70V transformer)
- Surface-mount Backbox: PC712
- *Standard 12" Analog Clock: Source from clock supplier.*

SCB Series Summary (for clock/speaker centers)

Model No.	Description	Dimensions	For Use With
SCB-300	Panel w/square perforated grille	27.25" x 17"	Recessed Backbox PC312
SCB-700	**Panel w/square perforated grille**	**26" x 14.5"**	**Surface-mount Backbox PC712**

25.938"

13.750"

14.438"

20.750"

2.594"

.344"

Universal mounting bracket installs with hardware provided for horizontal or vertical installation of a standard 12" analog clock (by others)

Studs