

3-in-1 Video Conferencing Device

RICOH
imagine. change.

RICOH Meeting 360



Meet the New

RICOH Meeting 360

Designed to enhance engagement in hybrid work environments, this 3-in-1 video conferencing device brings people and ideas together.




360° Panoramic Views

Meeting 360 utilizes dual high-resolution cameras to deliver clear and comprehensive panoramic views of your meeting space. All participants can be seen in vivid detail, regardless of their position in the room.




Active Speaker Focus

With advanced speech detection technology, Meeting 360 automatically highlights and focuses in on active speakers, giving every member of your team a seat at the table.

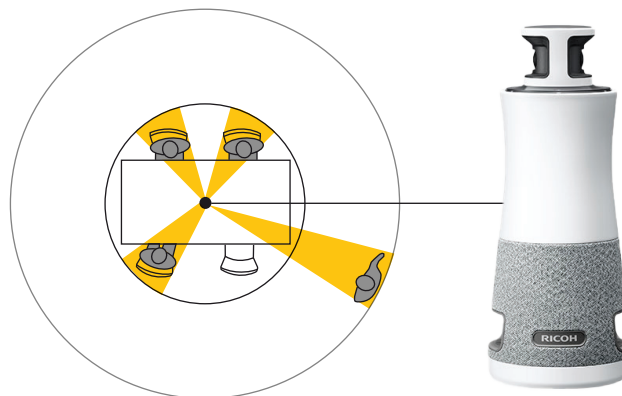

Crystal Clear Audio

Meeting 360 captures and equalizes voices from all directions with its multi-microphone array. Multiple integrated speakers make remote attendees sound as if they're in the room.

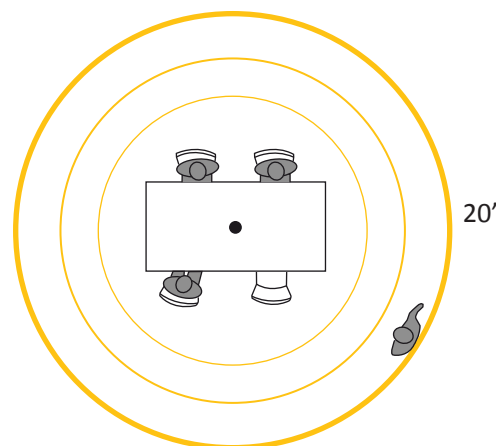



Screen Layout Switching

Choose from various screen layouts, all featuring a 360° panoramic view of your meeting space. Switching layouts is effortless with Meeting 360 – simply tap the button on top of the device to change views.



User Friendly Design

Featuring a sleek design that's both stylish and practical, Meeting 360 is easy to deploy with simple USB Type-C connectivity. Convenient volume adjustment and mute controls are accessible from both sides of the device, allowing for easy management from anywhere around the table.



Multi-Platform Compatibility

Certified for Zoom- and designed for every platform. Meeting 360 offers compatibility with your favorite video conferencing platforms, including Microsoft Teams, Google Meet, Cisco Webex and more.



RICOH Meeting 360

Product Name		RICOH Meeting 360 V2		
Part Number		432688		
Camera	Field of view(FOV)	Horizontal: 360 degrees, Vertical: 45 ± 2 degrees		
	Output resolution*1	1,920 x 1,080, 1,280 x 720		
	Frame rate*2	30 fps, 10 fps		
	Image processing	Auto White Balance, Auto Exposure, Anti-Flicker, LTM(Local Tone Mapping), Dewarping, Stitch, Cropping, Zoom (Scalar)		
Microphone	Method	Three-microphone array		
	Directivity	360°		
	Audio pickup range	19.7 ft (6.0 m) in closed environments		
	Audio processing	Mute, Auto Gain Control, Noise Reduction, Echo Cancellation		
Speaker	Wattage x Number of speakers	8Wx3		
	Directivity	360°		
	Sound Pressure Level(SPL)	Power supply from AC adapter	91 dB(1 m)	
		Power supply from PC via USB Type-C cable	81 dB(1 m)	
Network*3	Ethernet	10BASE-T, 100BASE-TX, 1000BASE-T		
	Wireless LAN	802.11a/b/g/n/ac/ax		
Screen layout	Single unit*4	1. 360° panoramic image & Auto-selected speakers image [Default]		
		2. 360° panoramic image & Pin Screen image*5		
		3. 360° panoramic image & Pin Screen image with Auto-selected speakers image*1		
		4. 180° panoramic image x 2		
Dimensions (W x D x H)		4.34 x 4.34 x 10.73(inches) / 110.2 x 110.2 x 272.6 (mm)		
Weight		2.49lb / 1.13kg		
Interface	USB Type-C port	2 ports (USB 2.0, USB 3.1, PD 3.0)		
	Ethernet port*11	RJ-45x1 port		
	Kensington security slot	Standard slot(3 mm x 7 mm)x 1 slot		
	USB Power delivery	Power supply from AC adapter	DC20 V / 2.25 A(max), AC100-240 V 50-60 Hz 1.7 A	
Power supply from PC via USB Type-C cable		DC5 V / 3 A(max)		
Power consumption*10	Power supply from AC adapter	45W		
	Power supply from PC via USB Type-C cable	15W		
Environmental condition	Temperature	10-32°C		
	Humidity	15-80% (No condensation)		
Operating environment	Supported OS	Windows 10 version, 1803 or higher / Windows 10/11 (64 bit) / macOS 12/mac OS 13/macOS 14		
Supported video conferencing platforms*12		Microsoft Teams*13 / Zoom / CiscoWebex® / Google Meet™		
In-box contents		Ricoh Meeting 360 V2, AC adapter 45W (20 V 2.25 A), AC power plug*14, USB 3.1/2.0m/3A cable(Type-C to C)x 2, Warranty URL, Read This First, Quick Guide		
Recommended usage environment (When using the layout including active speakers' focus images)		Number of users: 1-8 person(s), Range of seated angle: 45 degrees per person Installation position: The main unit must be put within 11.81' (3.6m) away from person(s) speaking.		
Installation	Tripod screw thread	1/4inch tripod screw hole on the bottom		
Standard Warranty Period		3 Year Advance Exchange		

*1 Frame rate is automatically switched depending on the speed of the web conference application in use. *2 With AC adapter: 30 fps/With power supply via PC: 10 fps *3 Network is used only on the occasion of firmware update. *4 Up to speakers are closed-up and displayed *5 Pin Screens set by RICOH Meeting 360 Apps *6 Up to 3 persons/unit, total *9 Network is used only on the occasion of firmware update. *10 In case PC is compatible with USB power delivery (PD) *12 Operation-checked on browser.

Free software / Downloadable software

Product name	RICOH Meeting 360 Apps for Windows, RICOH Meeting 360 Apps for Mac
Compatible OS	Windows 10 version, 1803 or higher / Windows 11 (64bit) / macOS 12/mac OS 13/macOS 14

Note: Download the RICOH Meeting 360 Apps for Windows or MacOS from RICOH's web site.

Points to note for the use of the product

●This product cannot be connected to the network of WPA2™ Enterprise. ●Web conference applications that don't support the resolution of 1920 x 1080 pixels are not compatible with this product. ●The USB port on this product is USB Type-C. The USB cable supplied with the product is also Type-C at both ends. If using a USB cable of another type for PC connection, please prepare the cable. ●When setting up the product, do not place it on an unstable desk or table, but set it horizontally. The product should be placed at least 65 cm away from walls and displays, and no objects should be placed around the product that may interfere with image and sound capturing. ●This product should be basically used in conjunction with a Web conferencing system. It is necessary to subscribe to a Web conferencing service that has been verified to work properly. ●This product should not be used in a virtual desktop environment such as a thin client or remote desktop. ●When this product is connected to a PC, it is recognized as a single network communication path (network adapter). Depending on the computer configuration and onboard software, the network settings may switch automatically.

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2024 Ricoh Company, Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Company, Ltd.