


48-Port 6P6C USOC Patch Panel

PRODUCT SPECIFICATION

Package includes:

- A. 48-Port 6P6C USOC Patch Panel, 1 pc
- B. 6" Cable Tie, 10 pcs
- C. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, 8 pcs
- D. Installation Instructions, 1 sheet

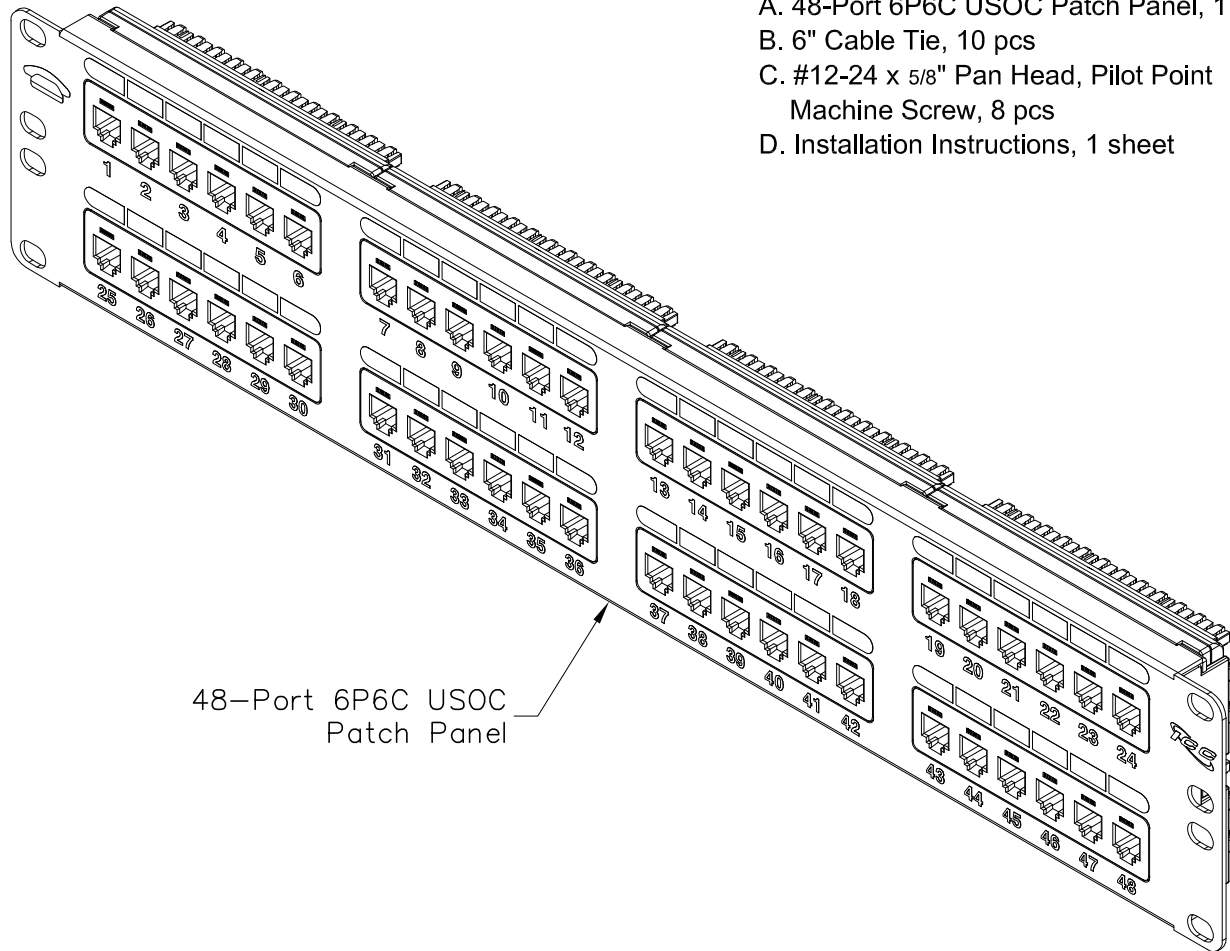

Features and Benefits:

- Rack mounted 6-position 6-conductor USOC patch panel provides voice connectivity applications
- Engineered to provide 110 IDC termination reducing installation time
- Includes USOC and UTP wiring label
- Designed to fit all standard 19" racks and cabinets
- 2 rack mount space (RMS)
- Terminate with ICACSPDT00 110 punch down tool
- Installation instructions
- UL listed

PATCH PANEL, USOC, 6P6C, 48-PORT, 2 RMS

ITEM NO. ICMPP048U6


REV. C

DWG NO. PSMPP048U6

PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

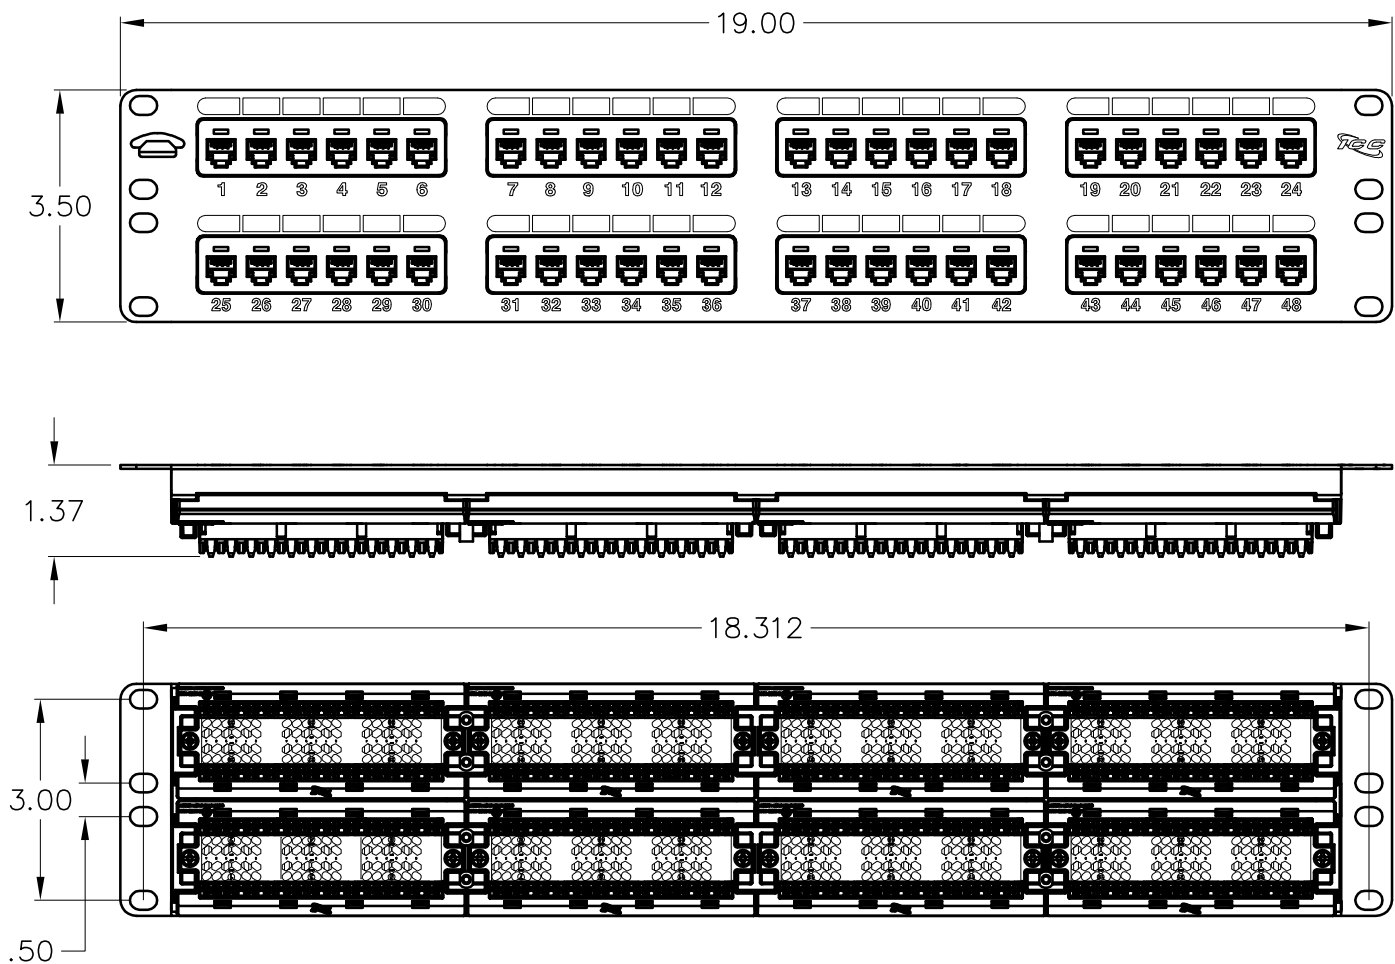

NOTE: UNLESS OTHERWISE SPECIFIED

1. 48-PORT 6P6C USOC PATCH PANEL:

A. MATERIAL:

- 48-PORT PATCH PANEL: 16 GA CRS
- JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- SPRING WIRE: PHOSPHOR BRONZE
- 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

B. SURFACE FINISH: BLACK POWDER COAT

C. MECHANICAL:

- MATING FORCE: 100 GRAMS MIN/CONTACT
- TEMPERATURE RANGE: -40°~70°C
- PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- IDC WIRE GAUGE: 22~24 AWG

D. ELECTRICAL:

- CURRENT RATING: 1.5 AMP DC
- CONTACT RESISTANCE: 2.5 MILOHMS MAX

WIRING DIAGRAM:

6 POS. 6 COND.	110 CONNECTOR	COLOR
4	1	WHITE/BLUE
3	2	BLUE
2	3	WHITE/ORANGE
5	4	ORANGE
1	5	WHITE/GREEN
6	6	GREEN

UL US FILE NO. 125268

PATCH PANEL, USOC, 6P6C, 48-PORT, 2 RMS

ITEM NO. ICMPP048U6

REV. C

DWG NO. PSMPP048U6

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com