


2 GHz 1x6 Deluxe Video Splitter Resi Module

PRODUCT SPECIFICATION

Package includes:

- A. 2 GHz 1x6 Video Splitter, 1 pc
- B. Mounting Bracket, 1 pc
- C. Locking Button, 4 pcs

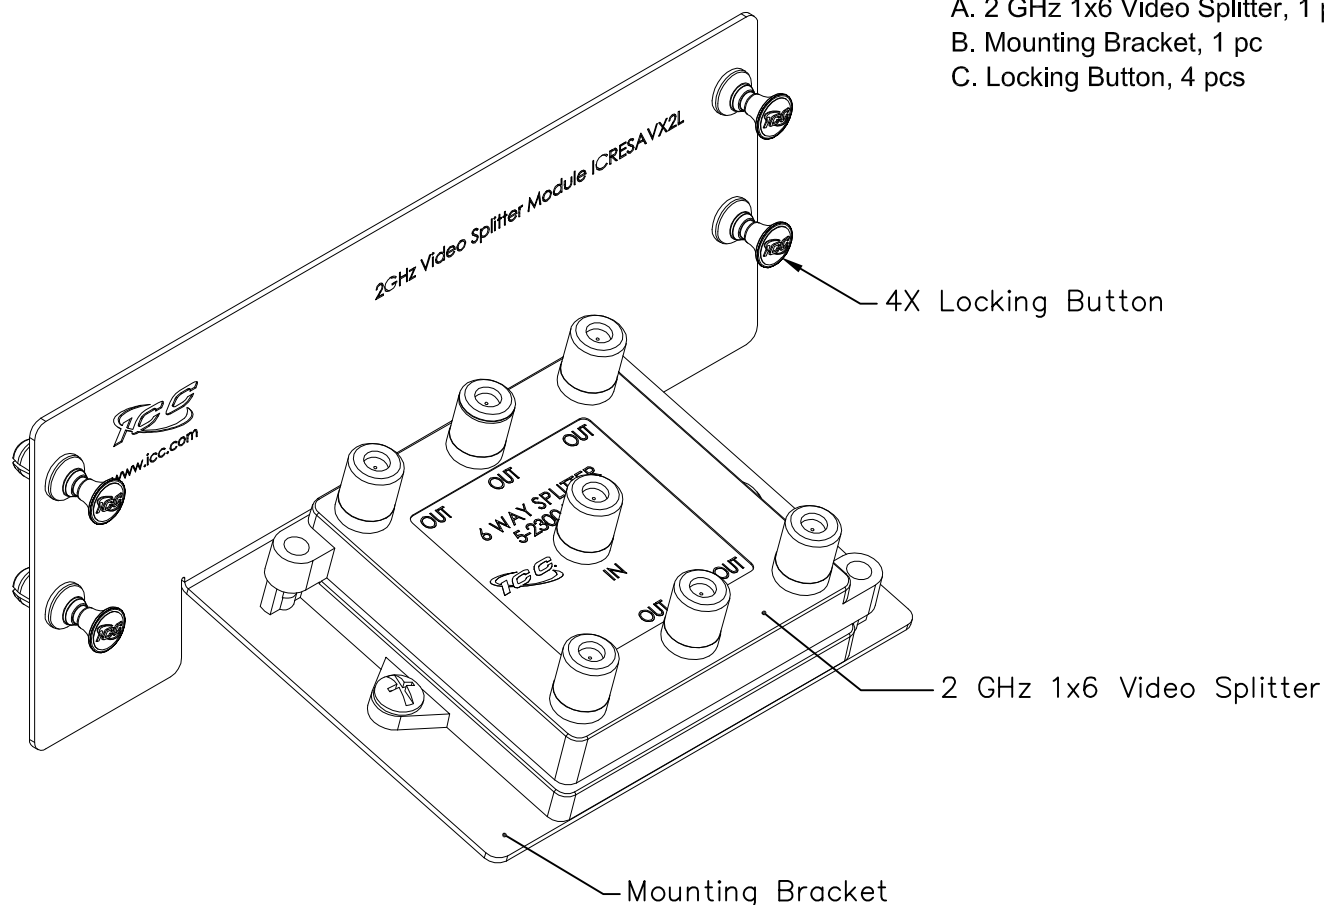

Features and Benefits:

- Designed to provide excellent signal quality for splitting HDTV, satellite, cable, UHF/VHF, antenna, or security system signals up to 6 locations with the frequency bandwidth from 5 to 2300 MHz
- Ideal for home or small office use
- Used with ICRESAM25C drop amplifier resi module installed between the signal source and the splitter input connector to compensate for splitter insertion loss and to ensure adequate incoming signal levels if needed
- Fits all ICRESDC 14", 21", and 28" resi distribution center enclosures with the 4 locking buttons




RESI MODULE, DELUXE VIDEO SPLITTER, 1X6, 2 GHZ

ITEM NO.	ICRESAV62L
DWG NO.	PSRESAV62L

REV.	A
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

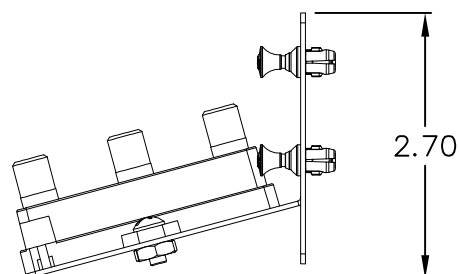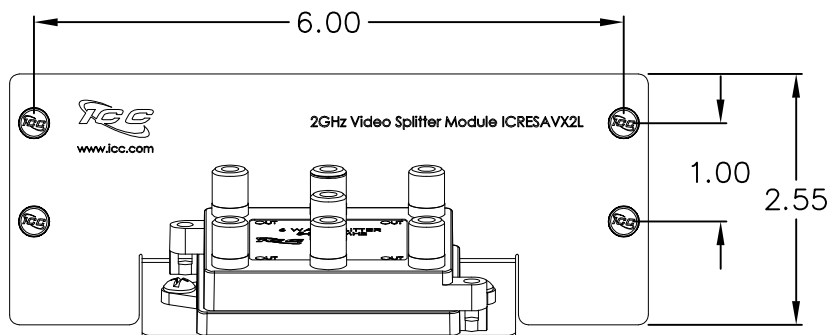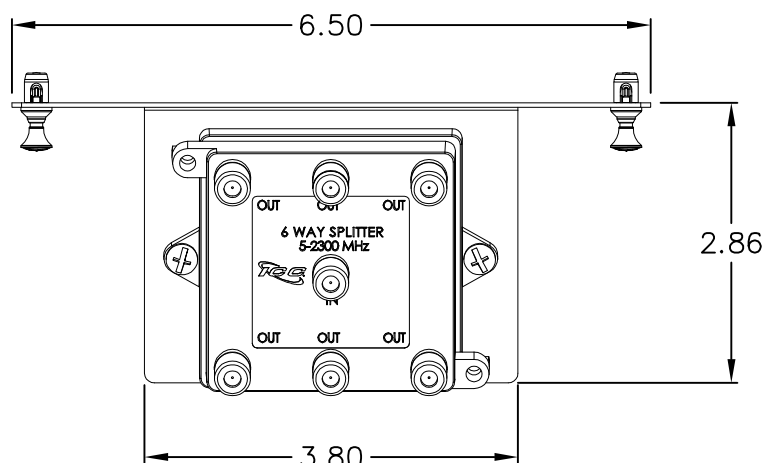

NOTE: UNLESS OTHERWISE SPECIFIED

1. 1X6 VIDEO SPLITTER:
 - A. HOUSING: DIE-CASTING WITH NICKEL PLATING
 - B. CONNECTORS: F-TYPE FEMALE
 - C. FREQUENCY RANGE: 5 ~ 2300 MHZ
 - D. INSERTION LOSS: 15 dB TYPICAL
2. MOUNTING BRACKET:
 - A. MATERIAL: 18 GA CRS
 - B. SURFACE FINISH: WHITE POWDER COAT
3. LOCKING BUTTON: MATERIAL: NYLON 6/6, UL 94V-0

Port	Frequency Range (MHz)	6 port (dB)
Output-Isolation	5-47	19
	47-1000	19
	1000-2050	19
	2050-2150	19
	2150-2300	19
	2300-2450	18

RESI MODULE, DELUXE VIDEO SPLITTER, 1X6, 2 GHZ

ITEM NO. ICRESAV62L
DWG NO. PSRESAV62L

REV. A
PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com