





Category 6A 10G UTP Patch Panel, 24-Port, 1 RMS

INSTALLATION INSTRUCTIONS

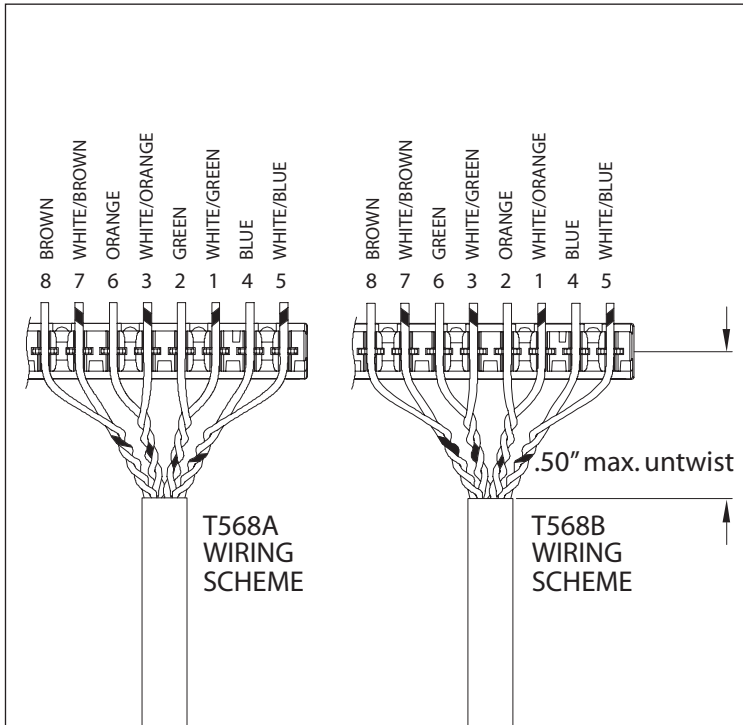


Step 1. Choose between T568A or T568B wiring configuration.

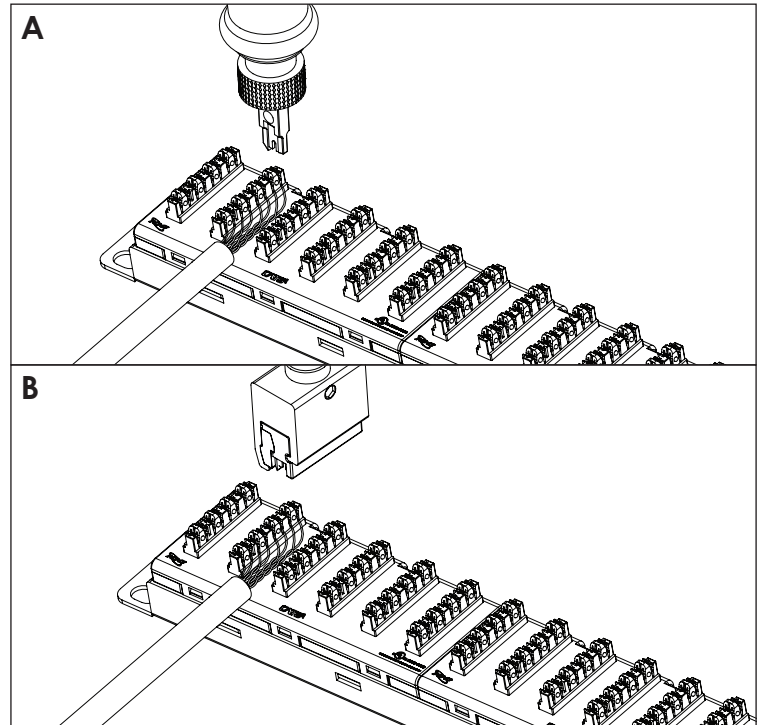


Step 2. Terminate conductors using a single blade punch down tool (A) or a four pair punch down tool (B).


OPTIONAL ACCESSORIES

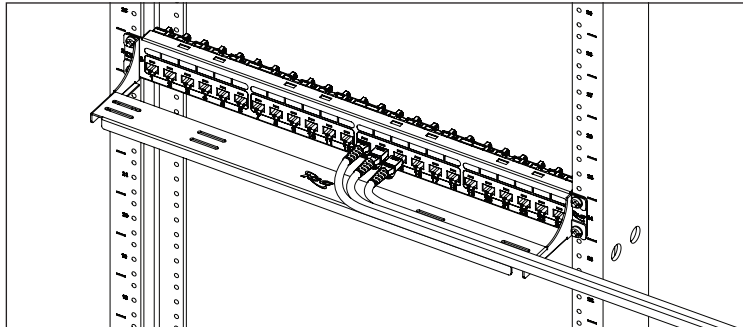


Optional. Install 3" deep cable management bar on the front of the patch panel. Part No. ICCMSFCMRP (Recommended)

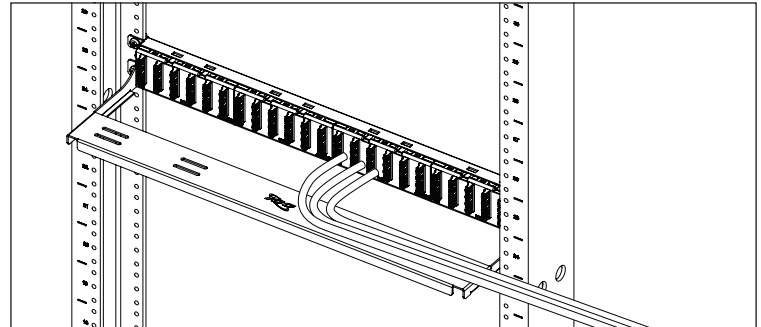

Optional. Install 5" deep cable management bar on the rear of the patch panel. Part No. ICCMSRCMRP (Recommended)

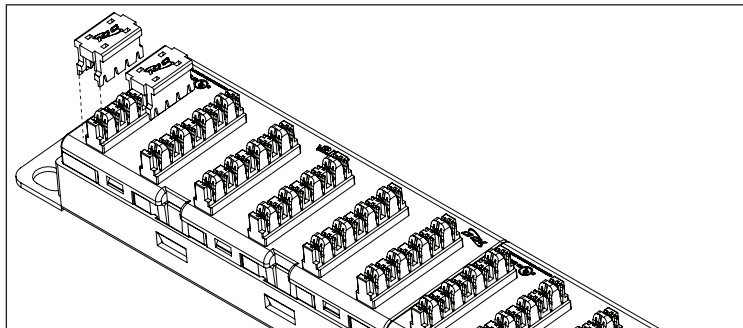

Optional. Install retention cap on 110-Type IDC to secure terminated wires. Part No. IC110TC450

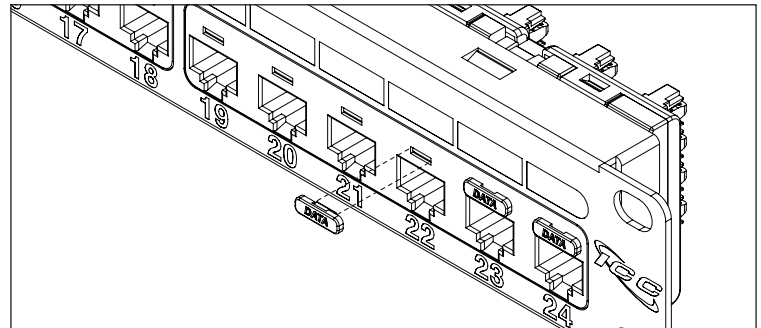


Optional. Identify each port with colored application icons. (Sold separately)



Category 6A 10G UTP Patch Panel, 24-Port, 1 RMS

INSTALLATION INSTRUCTIONS

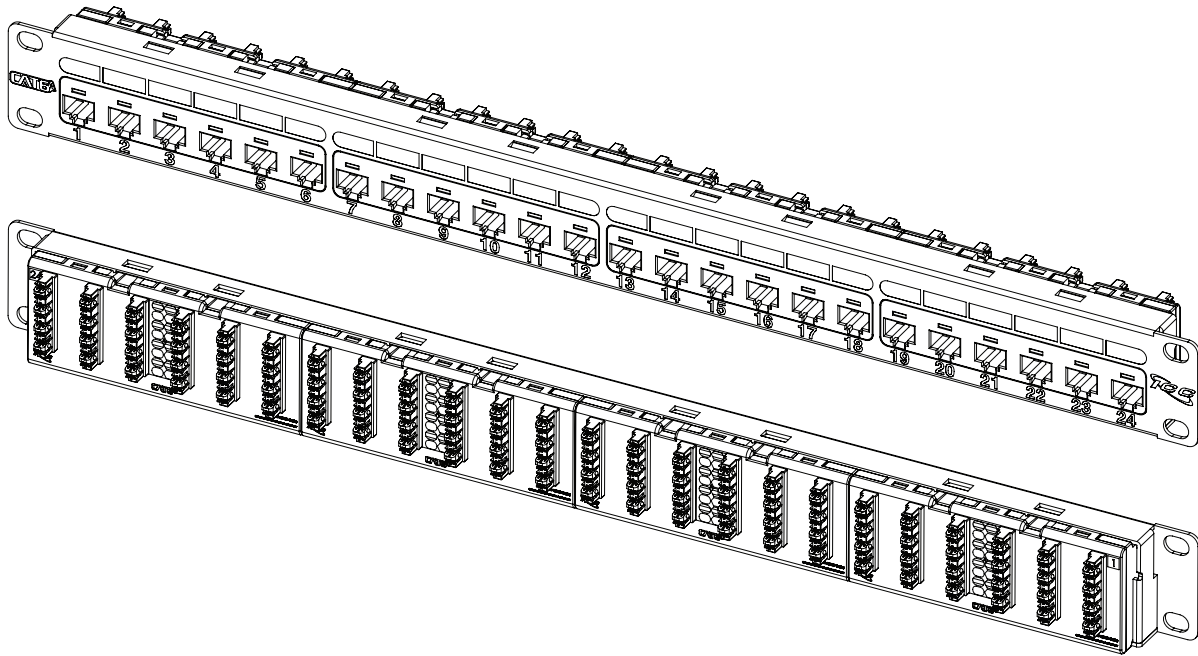


Part No.	Description	No. of Ports	Height (H)	#12-24 Screws
ICMPP0246B	CAT 6A 10G UTP Patch Panel, 24-Port, 1 RMS	24	1.75"	4

FEATURES AND BENEFITS

- Vertical 110-Type IDC connections helps speed up installations and reduces potential Alien Crosstalk (ANXT)
- Enhanced crosstalk cancellation and reduced return loss for high bandwidth network requirements
- Exceeds ANSI/TIA-568 CAT 6A (10G) connecting hardware Component Rating requirements
- 110-Type IDC termination help reduce installation time and improve wire retention
- 50 micro inch gold plating on all modular contacts to protect from corrosion
- Mounts on industry standard 19" wide racks or equipment
- T568A or T568B wiring schemes; **not compatible with 110-type patch plug**
- UL® listed


OPTIONAL ACCESSORIES

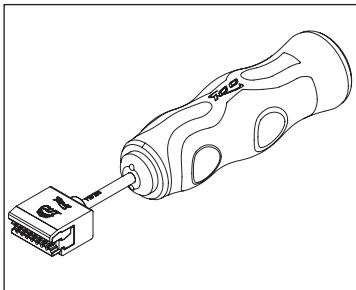

4-Pair 110 Punch-Down Tool

ICACSPDT4P


- Handle and 4-Pair head
- For use with 110 wiring blocks and patch panels
- Anti-slip rubber grip
- 110lbs of impact

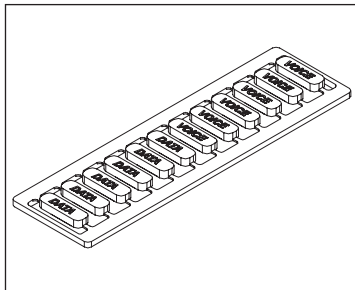

Patch Panel Color Application Icons

- ICMPPSCIxx¹ Voice & Data, 6 ea
- ICMPPICDxx¹ Data, 12 pcs
- ICMPPICVxx¹ Voice, 12 pcs
- Each set includes 12 icons
- For port identification


Color (xx¹) = BL, GN, GY, IV, OR, PR, RD, WH, YL

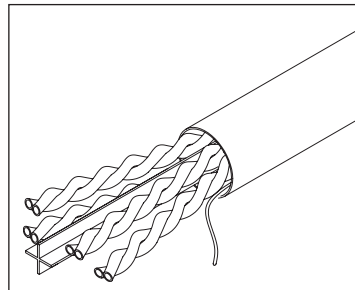

CAT 6A UTP Premise Cables

- ICCABP6Axx¹ UTP/CMP
- ICCABR6Axx¹ UTP/CMR
- 650 MHz, 4-Pair, 23 AWG
- Solid copper cable
- Designed with an X separator
- 1000 feet per reel

Color (xx¹) = WH, BL

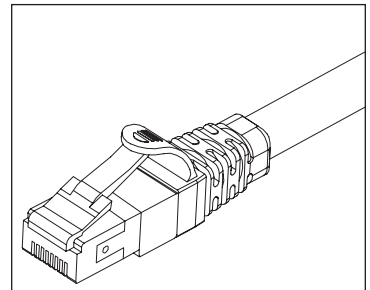

CAT 6A FTP Patch Cords

ICPCSGzzxx¹

- 4-Pair, 26 AWG
- Stranded conductors
- Shielding 360° to protect from EMI
- Factory tested and wired T568

Length (zz¹)=03, 05, 07, 10, 15, 25 feet
Color (xx¹) = WH, BL, YL, BK

888-ASK-4ICC

csr@icc.com

icc.com