


Preterminated 66 Wiring Block w/12 RJ-45 Jacks 8P8C

PRODUCT SPECIFICATION

Package includes:

- A. 8P8C Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc

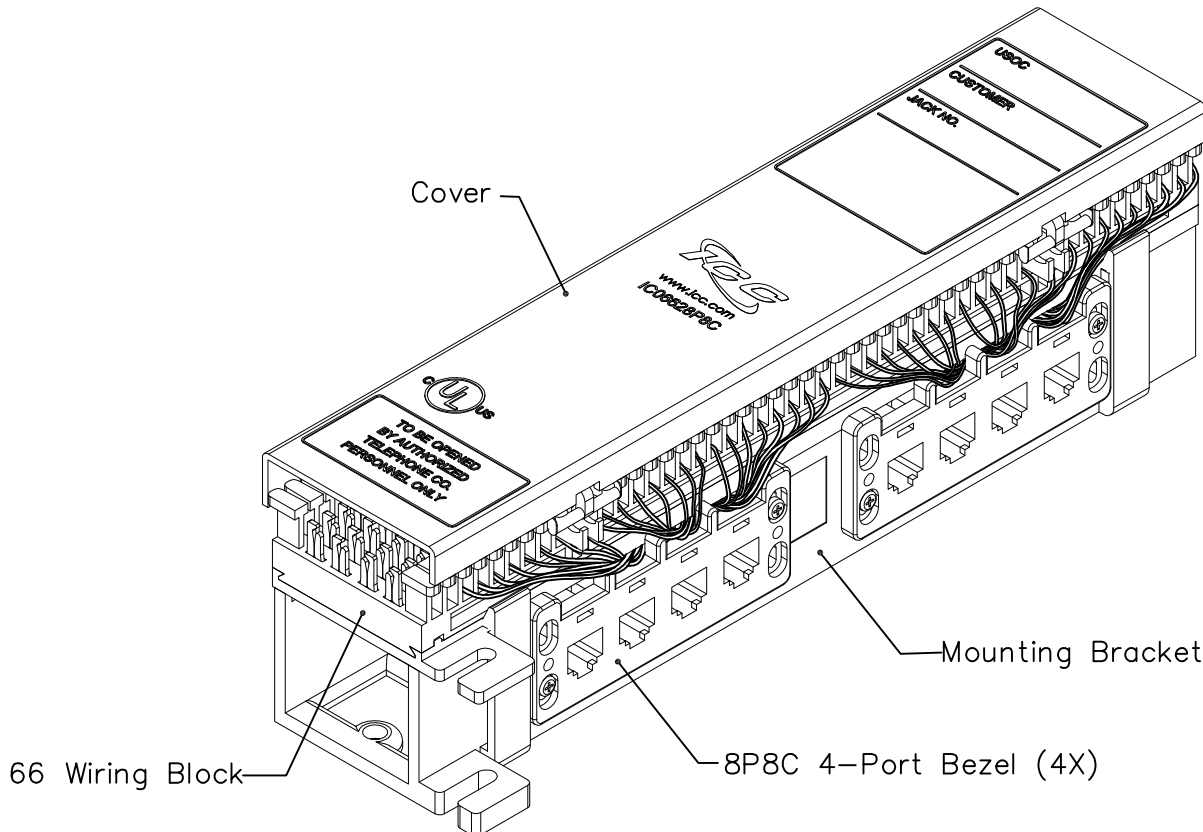

Features and Benefits:

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Removable hinged cover provided.
- Accepts 22~24 AWG.


66 WIRING BLOCK, 12-JACKS, 8P8C

ITEM NO.	IC06628P8C
DWG NO.	PS06628P8C

REV.	B
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

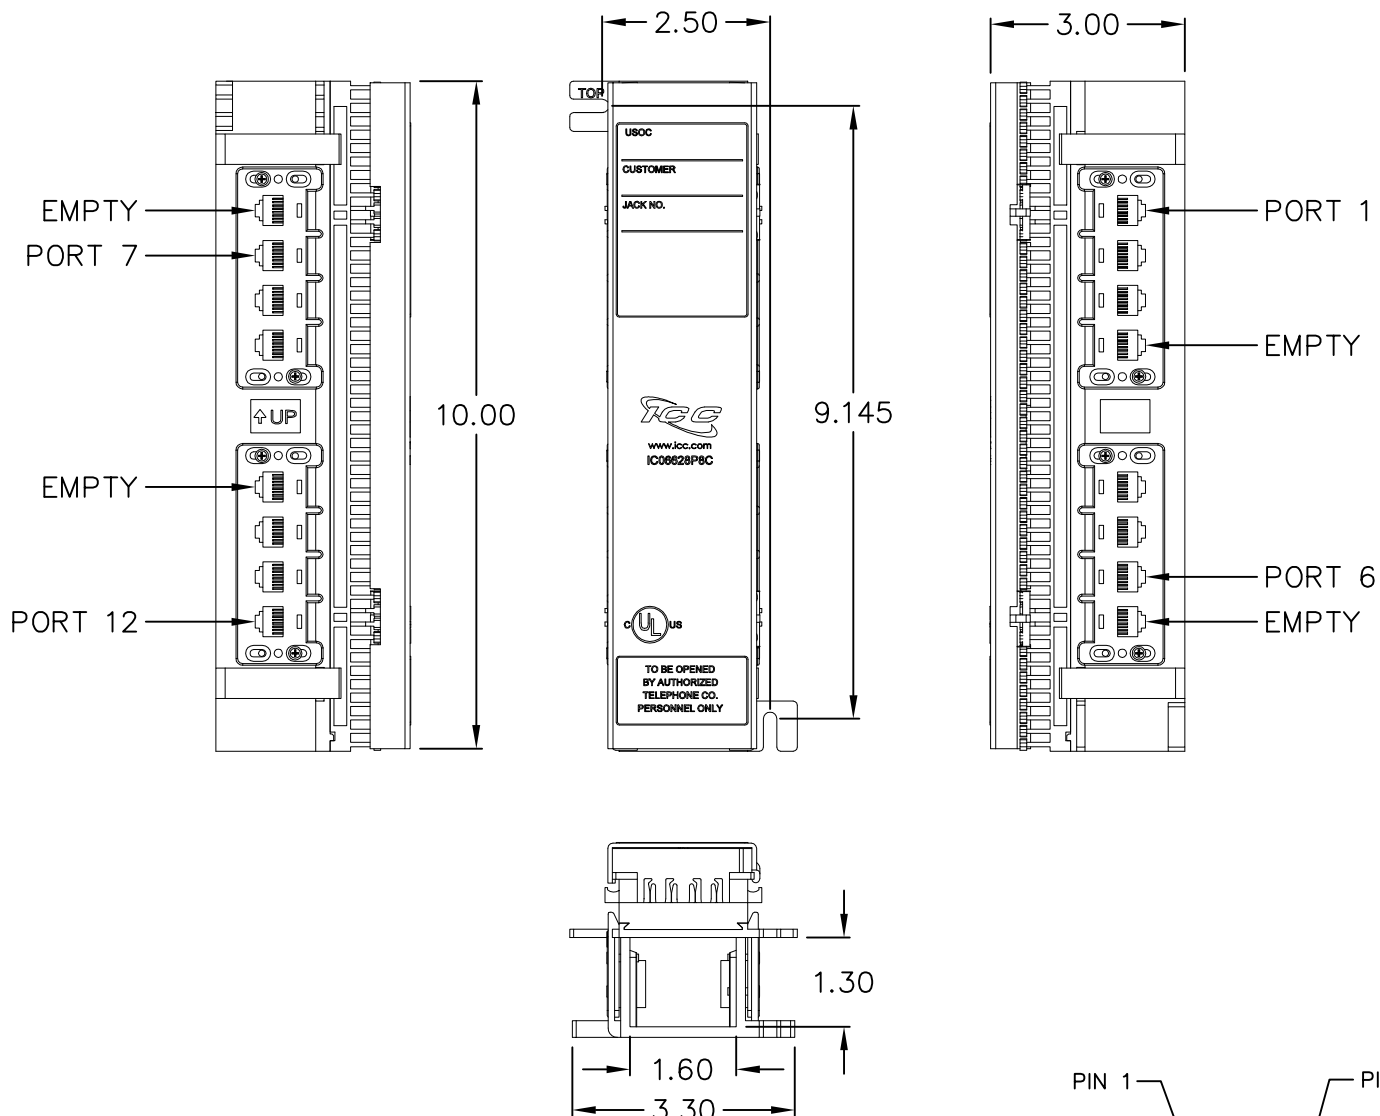

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD OVER 70~100 MICRO INCH OR NICKEL

2. TEMPERATURE RANGE:


- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. NONCONDENSING: 93%

3. ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

4. MECHANICAL:

- A. RETENTION: 50N (11 LBF) FOR 60S ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22~24 AWG

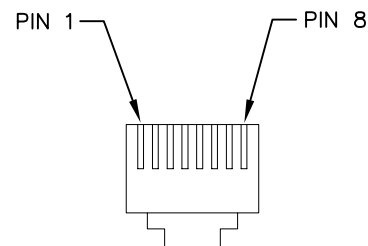

PIN	WIRE COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

66 WIRING BLOCK, 12-JACKS, 8P8C

ITEM NO. IC06628P8C

REV. B

DWG NO. PS06628P8C

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com